

TriaAir[®]

Ventilationsanlæg

Tekniske data

J Prime 25_90, 1RH, 3RC og ROTOR



Varenr.: QD09000250
Med 1RH, 3RC og ROTOR
(1RH varmefflade maks. 57,63 kW)
(3RC kølefflade maks. 74,92 kW)

Standardfarve: RAL 9002 glans 30 (hvid)



TECHNICAL DATA			
Date	21.08.2020	Rev. Date	24.09.2020
Project ID	4157	Tracking Number	4126
Project Name	Item no. QD09000250		
AHU Name	J Prime_25_90_1RH_3RC		
AHU Model	JUPITER 12 X 20		




Ecodesign Requirements Table

		Value		2018
	Product	JUPITER 25		
	Erp	2018		
A	Manufacturer	BSK Havalandırma Ekipmanları A.Ş.		
B	Model Identifier	JUPITER 12 X 20		
C	ErP Code	NRVU - BVU		
D	Type Of Drive	Variable Speed Drive (VSD)In	Variable Speed Drive (VSD)Out	Required
E	Type Of HRS	Rotary		
	HRS Damper	Exists		Exists Required
F	Thermal Efficiency of HRS	74,46 %		74,46 % >= 73 %
G	Nominal Flow Rate	2,35 m³/s	2,35 m³/s	
H	Effective Electrical Power Input	2,76 kW	2,7 kW	5,46 kW
I	SFPInt	362 W/(m³/s)	412 W/(m³/s)	774W/(m³/s) <= 844
J	Face Velocity	1,58 m/s	1,54 m/s	
K	Nominal External Drop Δps, Ext	250 Pa		250 Pa
L	Internal Pressure Drop Δps, Int Supply Air	277 Pa		277 Pa
	Internal Pressure Drop Δps, Int. Exhaust Air	258 Pa		258 Pa
M	Additional Pressure Drop Δps, Add	106 Pa	106 Pa	
N	Static Fan Efficiency EC327/2011	48,67 %	47,95 %	
O	Declared Maximum Ext./Int. Leakage Rate	1,00 %		1,00 %
	Leakage Classifications by Eurovent	L1		L1
P	Energy Performance Of Filters	E	E	
Q	Description Of Visual Filter Warning	Manometer Pressure Gauge	Manometer Pressure Gauge	Required
R	Casing Sound Power Level (Lwa)	65,3 dBA		65,3 dBA
S	Internet Address Of Instructions	www.Termicplus.dk		
	Total Dimension mm	W 1.660 x H 2.235 x L 3.000		
	Supply Airflow	8.450 m³/h		8.450 m³/h
	Return Airflow	8.450 m³/h		8.450 m³/h
	Design Outdoor Temp. Summer	(+25,8°C) (Hum. 60%)		(+25,8°C)
	Design Outdoor Temp. Winter	(-12 °C) (Hum. 90%)		(-12 °C)
	FRESH AIR CONNECTION Air Velocity	2,40 m/s		2,40 m/s
	SUPPLY CONNECTION Air Velocity	2,40 m/s		2,40 m/s
	RETURN CONNECTION Air Velocity	2,40 m/s		2,40 m/s
	EXHAUST CONNECTION Air Velocity	2,40 m/s		2,40 m/s
	Total Heating Capacity	37,49 kW		37,49 kW
	Fluid Kind for Heating	Water		Water
	Fluid Temp. In / Out (Heating)	70/50 °C		70/50 °C
	Total Cooling Capacity	36,88 kW		36,88 kW
	Fluid Kind for Cooling	Water		Water
	Fluid Temp. In / Out (Cooling)	7/12 °C		7/12 °C
	Filter Type supply Air	F7 Panel		F7 Panel
	Filter Type Return Air	M6 Panel		M6 Panel
	Total Weight	1.352 kg		1.352 kg



Accessories	Connection possible (Motherboard)	Included in the unit	Overall Total values
Co2 sensor	Yes	No	
Motion Sensor	Yes	No	
Heating Module	Yes	Yes	70/50 °C
Cooling Module	Yes	Yes	7/12 °C
Hood for supply air	Yes	No	
Hood for Exhaust air	Yes	No	
VAV	Yes	No	
Heating coil valve	Yes	No	
Cooling coil valve	Yes	No	
Electric Pre-heater	Yes	No	
Electric Heater	Yes	No	
Fire/smoke Automatic	Yes	No	
Steam Humidifier (M7)	Yes	No	
Prepared to fire	Yes	No	
Prepared to Smoke	Yes	No	
Motherboard/Display	Yes	Yes	
Kitchen Unit	Yes	No	
Unit Used as a smoke fan	Yes	No	

Air Flow



J Prime 25_90

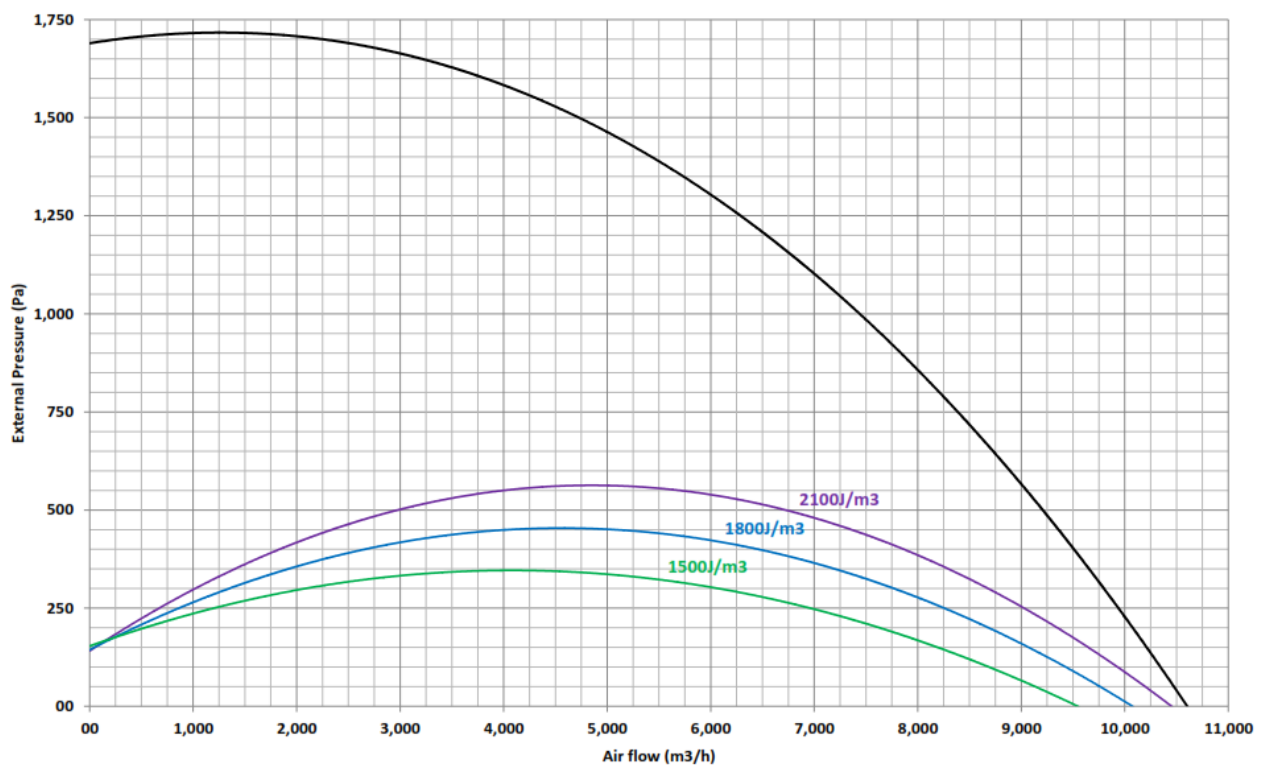

Efficiency Jprime 25_90

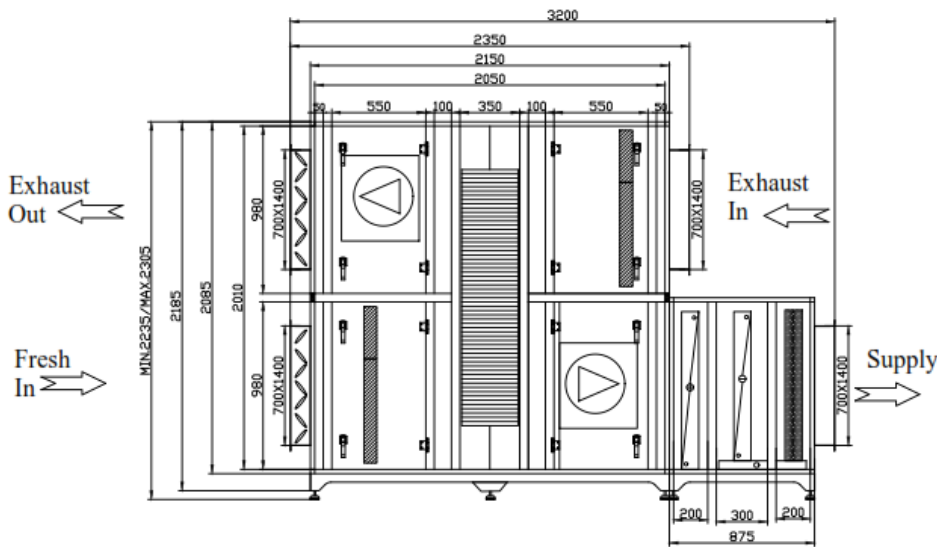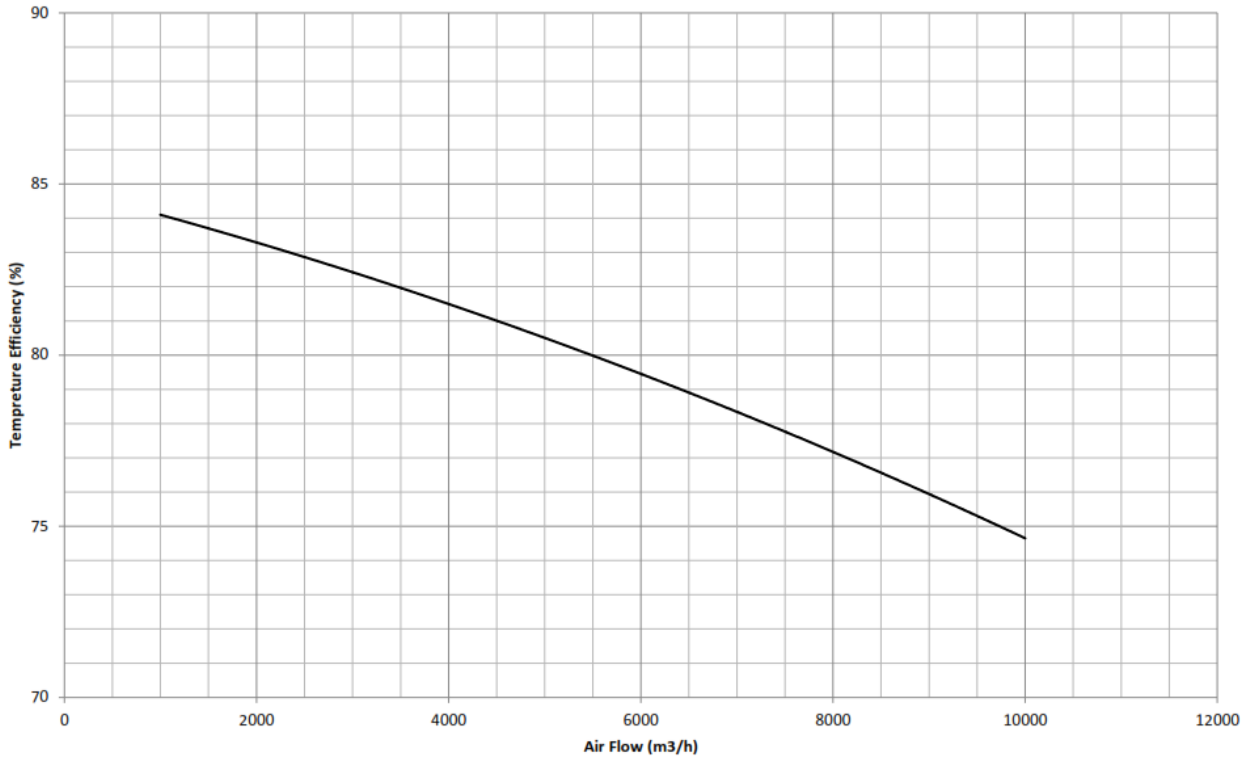

NOTE: ALL DIMENSIONS ARE MM

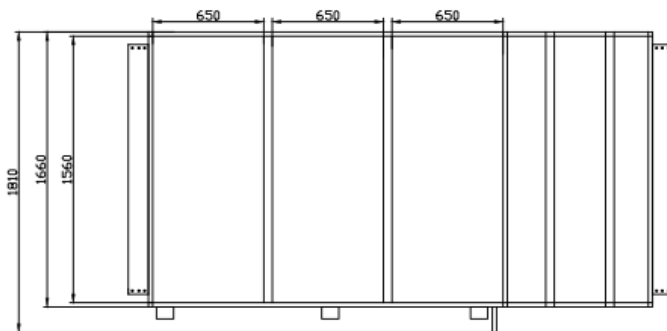



ATTESTATION OF CONFORMITY UYGUNLUK ONAYI

Sertifika Numarası / Certificate Number : M.2020.ST.1195.01

Üretici <i>Manufacturer</i>	: BSK Havalandırma Ekipmanları Anonim Şirketi
Üretici Adresi <i>Manufacturer adress</i>	: Mimar Sinan Mah. Basra Cad. No:59 Sultanbeyli İSTANBUL / TÜRKİYE
Ürün Tanımı <i>Product description</i>	: Klima Santrali Standart&Hygienic Air Handling Units
Tip / Model <i>Type / Model</i>	: BSK JUPITER Serisi: 500m ³ /h - 100.000m ³ /h
İlgili Yönetmelikler <i>Related Directives</i>	: 2006/42/AT Makina Emniyeti Yönetmeliği/EK VIII 2006/42/EC Machinery Directive/Annex VIII
İlgili Standartlar <i>Related Standards</i>	: EN ISO 12100,EN ISO 14120,EN ISO 13849-1, EN 60204-1
Denetim Raporu <i>Audit Report</i>	: ST.1195.01

UDEM Adriatic d.o.o. adı ve adresi yukarıda belirtilen firmanın sunduğu teknik dokümanları inceleyerek, belirlenen ürünün Makina Emniyeti Yönetmeliği 2006/42/AT Ek VIII kurallarına uygunluğunu onaylar. Yukarıda belirtilen tiplerdeki ürün üzerine CE işaretini, üreticinin kendi sorumluluğunda hazırlayacağı AT Uygunluk Beyanı ile iliştirebilir. İncelemesi yapılan ürüne ait olan bu belge tasarımın değişmesi halinde geçerliliğini yitirecektir. Bu belgenin geçerliliğini www.udemadriatic.com internet sayfasından kontrol edebilirsiniz. Bu belge sadece yukarıda adı geçen ürün tip/modelleri için geçerlidir. Yukarıda adı geçen firma ve UDEM bu belgelerin bir kopyasını tescil tarihinden itibaren 15 yıl süreyle muhafaza etmelidir. Bu belgenin mülkiyet hakkı UDEM Adriatic d.o.o 'ya aittir ve istenildiğinde iade edilmelidir.

UDEM Adriatic d.o.o. confirms by examining technical documents presented on the part of company which stated title and address below that product is conformable to 2006/42/EC Annex VIII



Machinery Directive regulations, could attach marking on the product with EC Declaration of Conformity prepared by manufacturer in the charge of company. In case of changing this certificate design regarding to product examined, certificate will be expired. Please check validity of this certificate by website www.udemadriatic.com This certificate is valid just for the product type/models stated below. UDEM and Company above mentioned must retain a copy of these certificates for 15 years since the day of registration. This certificate property belongs to UDEM Adriatic d.o.o and if required it must be returned.

Yayın Tarihi / Issue Date : 29.09.2020

Geçerlilik Tarihi / Validity date : 28.09.2021



Udem Adriatic d.o.o

Adres: Radnička cesta 54/R3, Zagreb Croatia

Tel: +385 (1) 4819 601 Faks: +385 (1) 4819 434

E-posta: info@udemadriatic.com Web: www.udemadriatic.com

EC DECLARATION OF CONFORMITY / AT UYGUNLUK BEYANI



We herewith declare / İş bu beyanname ile



BSK HAVALANDIRMA EKİPMANLARI ANONİM ŞİRKETİ

Address: Mimar Sinan Mah. Basra Cad. No:59 Sultanbeyli İSTANBUL / TURKEY

Product Name: Standart&Hygienic Air Handling Units

Model: BSK JUPITER Serisi:500m3/h - 100.000m3/h

Year of Manufacture/ Serial Number: 2020/001

Regulations Applied

We declare that we meet the following directive conditions for the Air Handling Unit that we have assembled and manufactured.

- 2006/42/EC Machinery Directive/Annex VIII

Application Standard

- EN ISO 12100
- EN ISO 14120
- EN ISO 13849-1
- EN 60204-1

Date and Place of Declaration : 28.09.2020/İSTANBUL

Name and Surname :

Deniz Palat

Signature, Stamp



Mimar Sinan Mah. Basra Cad. No: 59/A
Sultanbeyli, İSTANBUL
Tel: 0216 669 09 72 (pbx) Fax: 0216 669 09 72
Sultanbeyli V.D : 187 000 3997


Address/Adres: Mimar Sinan, Basra Cad. No:59 Sultanbeyli / İstanbul



Phone / Telefon: : + 90 216 669 09 70

Mail: info@bskhavalandirma.com

Web : www.bskhavalandirma.com

DECLARATION OF CONFORMITY

	TECHNICAL DATA			
	Date	21.08.2020	Rev. Date	24.09.2020
	Project ID	4157	Tracking Number	4126
Project Name		J Prime 25 Selection		
AHUSEL V.	2.2.3.17 15.08.2020	AHU Name J Prime_25_90_1RH_3RC - (1 QTY)		
BSK	1/8	AHU Model JUPITER 12 X 20		

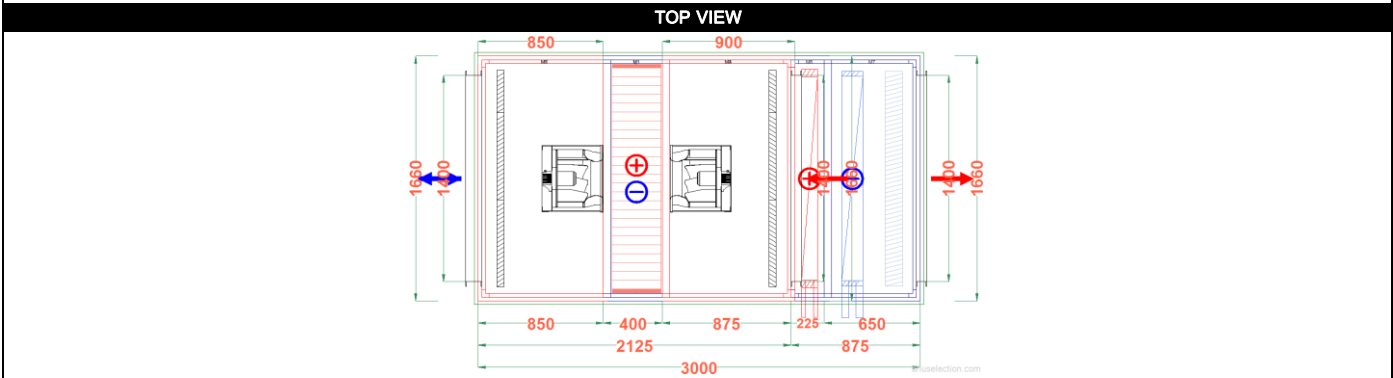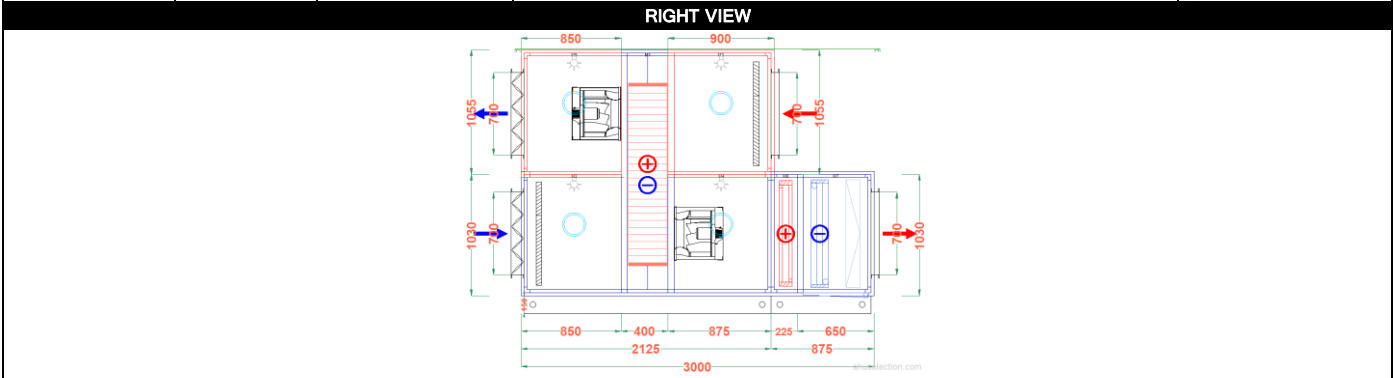

GENERAL SPECIFICATIONS				
Air Flow 8.450 m ³ /h	Return Air Flow 8.450 m ³ /h	Frame 25 steel profile	Total Dimensions mm W 1.660 x H 2.235 x L 3.000	
Air Velocity 1,58 m/s	Return Air Velocity 1,54 m/s	Insulation Material 50 mm Rockwool 70 kg/m ³	Total Weight 1.352 kg	
Coil Air Velocity 1,96 m/s	Air Density 1,3505 kg/m ³	Outside Sheet Material 0,9 mm Painted Galvanize	Base Height 150 mm	Roof (Outside) Sheet
Design Outdoor Temp.(W-S) (-12°C/90%)-(25,80°C/60%)(Odense)		Inside Sheet Material 0,9 mm Galvanize	Total Absorbed Power 5,47 kW	
Total Heating Capacity 37,49 kW	Total Cooling Capacity 36,88 kW	Total Sensible Capacity 21,70 kW	Motor Power 3,65 kW / 3,65 kW	
Specific Fan Power(SFP Total) 0,78 kW/(m ³ /s)	ErP Compliance 2018	ErP Code NRVU - BVU	Real Unit CAL Class -400 Pa L1	Real Unit CAL Class +400 Pa L2

SOUND POWER LEVEL (dB)										
Frequency Hz		125	250	500	1000	2000	4000	8000	LwA-tot	
Airborne Sound Power Level		69,9	68,9	64,8	56,2	57,2	45,6	40,3	65,3	dBA
Air Outlet Induct Sound Power Level		77,7	85,6	84,8	82,5	83,4	76,1	78,6	87,9	dBA
Air Inlet Induct Sound Power Level		84,9	83,2	78,6	65,2	58,8	48,3	48,1	78,6	dBA
Return Air Outlet Induct Sound Power Level		81,9	89,9	89,0	86,5	85,3	78,0	80,6	91,0	dBA
Return Air Inlet Induct Sound Power Level		84,9	83,2	78,6	65,2	58,8	48,3	48,1	78,6	dBA

ACCESSORIES




Lightening, Observation Glass, Manometer Pressure Gauge, Siphon


Model	CS Class	CAL Class -400 Pa	CAL Class +700 Pa	FBL Class	TT Class	TBF Class	Casing acoustical insulation at 125 Hz [dB]	Casing acoustical insulation at 250 Hz [dB]	Casing acoustical insulation at 500 Hz [dB]	Casing acoustical insulation at 1000 Hz [dB]	Casing acoustical insulation at 2000 Hz [dB]	Casing acoustical insulation at 4000 Hz [dB]	Casing acoustical insulation at 8000 Hz [dB]
JUPITER*	D2	L1	L1	F9	T2	TB2	18,4	27,2	30,1	35,4	33,3	36,5	43,9

*These results obtained according to Eurovent modelbox test.

www.bskhavalandirma.com.tr	Office Tel:	+90 216 669 09 70	Factory Tel:	+90 216 669 09 70
info@bskhavalandirma.com.tr	Office Fax:	+90 216 669 09 72	Factory Fax:	+90 216 669 09 72



		TECHNICAL DATA				
		Date	21.08.2020	Rev. Date	24.09.2020	
		Project ID	4157	Tracking Number	4126	
		Project Name	J Prime 25 Selection			
AHUSEL V.	2.2.3.17 15.08.2020	AHU Name	J Prime_25_90_1RH_3RC - (1 QTY)			
BSK	2/8	AHU Model	JUPITER 12 X 20			
FRESH AIR CONNECTION						
Connection Type		Control Type		Pressure Drop		
Gear Damper		Automatic (LM230ASR)		0 Pa		
Air Flow		Dimensions		Air Velocity		
8.450 m³/h		W 1.400 mm x H 700 mm		2,40 m/s		
SUPPLY CONNECTION						
Connection Type		Control Type		Pressure Drop		
Flange				0 Pa		
Air Flow		Dimensions		Air Velocity		
8.450 m³/h		W 1.400 mm x H 700 mm		2,40 m/s		
RETURN CONNECTION						
Connection Type		Control Type		Pressure Drop		
Flange				0 Pa		
Air Flow		Dimensions		Air Velocity		
8.450 m³/h		W 1.400 mm x H 700 mm		2,40 m/s		
EXHAUST CONNECTION						
Connection Type		Control Type		Pressure Drop		
Gear Damper		Automatic (LM230ASR)		0 Pa		
Air Flow		Dimensions		Air Velocity		
8.450 m³/h		W 1.400 mm x H 700 mm		2,40 m/s		
FILTER (M2)						
Air Flow	Condensation Pan			Hygienic	Spare Filter	Section Weight
8.450 m³/h						213 kg
Filter Type	Initial / Final / Design P.Drop	Air Velocity	Size/Quantity/EC*	Size/Quantity/EC*	Size/Quantity/EC*	Size/Quantity/EC*
F7 Panel	83 Pa / 183 Pa / 83 Pa	1,94 m/s	592x592x48/2/E	592x287x48/3/E		
* Filter Energy Performance; preferably energy classification						
* Frame sealing applied.						
ACCESSORIES (M2)						
Lightening, Observation Glass, Manometer Pressure Gauge						

	TECHNICAL DATA			
	Date	21.08.2020	Rev. Date	24.09.2020
	Project ID	4157	Tracking Number	4126
	Project Name	J Prime 25 Selection		
AHUSEL V.	2.2,3,17 15.08.2020	AHU Name	J Prime 25 90 1RH 3RC - (1 QTY)	
BSK	3/8	AHU Model	JUPITER 12 X 20	




ROTARY HEAT EXCHANGER (M1)

Model	Rpm	Quantity	Section Weight
RRU_ECO-P-E20-1550/1550-1500	15	1	253 kg

	Fresh Air	Exhaust	Capacity	Winter	Summer				
Air Flow	8.450 m³/h	8.450 m³/h		105,65 kW	-3,66 kW				
Air Vel.	2,36 m/s	2,70 m/s		Fresh	Exhau	Fresh	Exhaus		
	Winter		Summer	P.D	104 Pa	123 Pa	133 Pa	123 Pa	
	Effic.	Balan.(*)	Effic.	Balan.(*)	1,2kg/m³	129 Pa	121 Pa	129 Pa	121 Pa
	74,46	74,46	70,99	70,99					

Hum.Effic.	51,37 %	0,00 %						
Air Inlet / Outlet	Winter				Summer			
	Fresh Air		Exhaust		Fresh Air		Exhaust	
	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet	Inlet	Outlet
	DT	-12,00 °	14,80 °C	24,00 °C	0,59 °C	25,80 °C	24,52 °C	24,00 °C
WT	-12,29 °	9,68 °C	17,07 °C	0,31 °C	20,16 °C	19,77 °C	17,07 °C	17,51 °C
RH	90,00 %	51,44 %	50,00 %	95,00 %	60,00 %	64,74 %	50,00 %	46,31 %

Condensation Pan	OACF (*)	EATR (%) (*)
	0,00	0,00

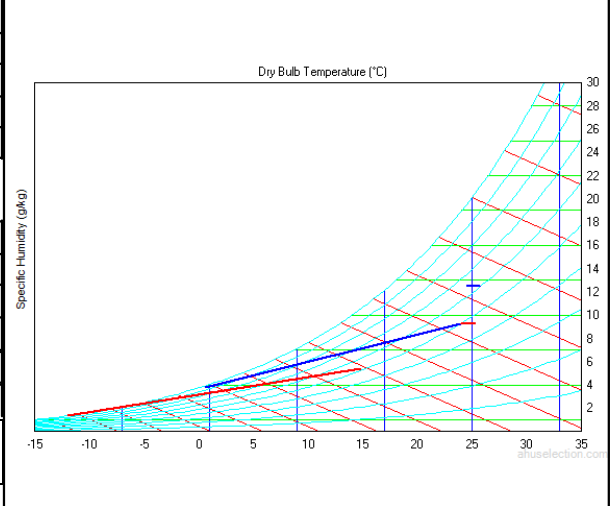


<input type="checkbox"/> Frequency Inverter	Size mm	Bypass Damper
	(1.550 x 1.550 x 330) - 1.500	

* Efficiency at balanced flow
* OACF: Outdoor Air Correction Factor, EATR: Exhaust Air Transfer Ratio

ACCESSORIES (M1)



	TECHNICAL DATA			
	Date	21.08.2020	Rev. Date	24.09.2020
	Project ID	4157	Tracking Number	4126
	Project Name	J Prime 25 Selection		
AHUSEL V.	2.2.3.17 15.08.2020	AHU Name		J Prime_25_90_1RH_3RC - (1 QTY)
BSK	4/8	AHU Model		JUPITER 12 X 20



SUPPLY FAN (M4)

Air Flow	8.450 m ³ /h	Fan Model	EBM Papst-R3G400PA2703			Quantity	1	Section Weight	175 kg										
Internal Static Pressure	277 Pa	Motor P./Pha./Volt./Freq.	3,65 kW/3P/400V/50-60Hz			Isolator		Isolator Count											
External Static Pressure	250 Pa				Backup Fan		Backup Motor												
Total Static Pressure	527 Pa																		
Total Pressure	633 Pa								System Effect	16 Pa									
Total / Static Efficiency	58,44 / 48,67 %																		
Shaft Power / Absorbed Power	2,54 / 2,76 kW								Absorbed Pow.With VFD	2,76 kW									
Fan Speed	2460 rpm (Max.2800 rpm)																		
	Air Density								1,3505 kg/m ³										
Specific Fan Power (SFPe int)	0,36 kW/(m ³ /s)								Sound Power Level (dB)										
Electrical Current	3,99 A (Max.5,73 A)								Hz	63	125	250	500	1000	2000	4000	8000	LwA-tot	
									SPLm - Outlet Side	74,8	76,1	81,8	84,4	86,5	88,0	81,3	84,7	92,6	dBA
									SPLa - Inlet Side	70,6	74,8	81,8	83,7	77,8	77,2	74,5	84,9	87,3	dBA





* The fan system effect is taken into account in the fan performance
 * The fan calculated for wet conditions
 * Sfp is calculated based on clean filter & dry coil conditions


ACCESSORIES (M4)

Lightening, Observation Glass	
-------------------------------	---------------------------------------------------------------------------------------

www.bskhavalandirma.com.tr	Office Tel: +90 216 669 09 70	Factory Tel: +90 216 669 09 70
info@bskhavalandirma.com.tr	Office Fax: +90 216 669 09 72	Factory Fax: +90 216 669 09 72

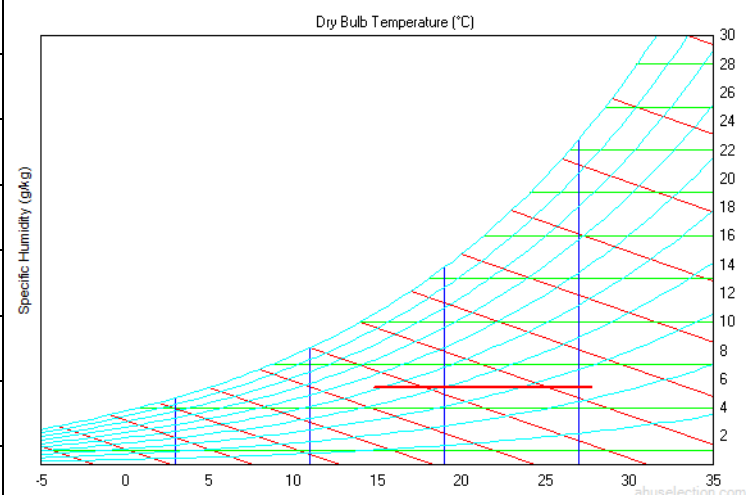

		TECHNICAL DATA					
		Date	21.08.2020	Rev. Date	24.09.2020		
		Project ID	4157	Tracking Number	4126		
		Project Name	J Prime 25 Selection				
AHUSEL V.	2.2.3.17 15.08.2020	AHU Name	J Prime_25_90_1RH_3RC - (1 QTY)				
BSK	5/8	AHU Model	JUPITER 12 X 20				
COIL (Heating) (M6)							
Air Flow	Capacity / Sensible	Required Cap.	Face Vel.	Quantity	Tube Mat.	Fin Mat.	Section Weight
8.450 m ³ /h	37,49/37,49 kW		2,06 m/s	1	Copper	Aluminium	82 kg
Coil Code			Tube Thickness	Fin Thickness	Mixing Ratio		
32 x 28 12 26T 1R 1380A 1.8P 13NC			0,35 mm	0,1 mm	%		
Droplet Elimin. / Press. Drop		Condensation Pan / Hmin U-Trap		Size (W x H x L) mm	Conn. Material	Frame Material	
				1.380 x 826 x 110	Steel	Galvanized Steel	
Fluid Kind	Fluid In / Out						
WATER	70/50 °C						
Air Inlet Drybulb Temperature	Air Outlet Drybulb Temperature						
14,80 °C	27,74 °C						
Air Inlet Wetbulb Temperature	Air Outlet Wetbulb Temperature						
9,68 °C	14,97 °C						
Air Inlet Relative Humidity	Air Outlet Relative Humidity						
51,44 %	23,25 %						
Air Inlet - Outlet Enthalpy	Fluid Flow / Vol. Flow						
28,45 - 41,59 kJ/kg	1.612 kg/h / 1.649 dm ³ /h						
Air Press.Drop	Fluid Press.Drop / Fluid Velocity						
25 Pa	7,07 kPa / 0,32 m/s						
Coil Surface Area	Tube Inner Volume						
31,65 m ²	4,83 L						
Manifold / Conn.QTY	Conn.Direction						
1 / 1	Right						
Connection Sizes			Air Condensation	Hygienic	Blygold		
26,9 / 26,9 mm (3/4" DN20 / 3/4" DN20)			0,00 l/h				
Bypass Damper							
ACCESSORIES (M6)							

	TECHNICAL DATA			
	Date	21.08.2020	Rev. Date	24.09.2020
	Project ID	4157	Tracking Number	4126
	Project Name	J Prime 25 Selection		
AHUSEL V.	2.2.3.17 15.08.2020	AHU Name	J Prime_25_90_1RH_3RC - (1 QTY)	
BSK	6/8	AHU Model	JUPITER 12 X 20	



COIL (Cooling) (Wet Surface) (M7)

Air Flow	Capacity / Sensible	Required Cap.	Face Vel.	Quantity	Tube Mat.	Fin Mat.	Section Weight
8.450 m³/h	36,88/21,70 kW		1,96 m/s	1	Copper	Aluminium	240 kg
Coil Code	25 x 22 3/8 34T 3R 1385A 2.8P 17NC		Tube Thickness	0,35 mm		Fin Thickness	Mixing Ratio
						0,1 mm	%
Droplet Elimin. / Press. Drop	Condensation Pan / Hmin U-Trap		Size (W x H x L) mm		Conn. Material	Frame Material	
Polypropylene / 18 Pa / 26,90 kg / QTY:1	Stainless Steel (Connection:Right) (Pressure:Positive) / 53,78 mm		1.385 x 864 x 145		Steel	Galvanized Steel	
Fluid Kind	Fluid In / Out						
WATER	7/12 °C						
Air Inlet Drybulb Temperature	Air Outlet Drybulb Temperature						
24,52 °C	16,78 °C						
Air Inlet Wetbulb Temperature	Air Outlet Wetbulb Temperature						
19,77 °C	15,35 °C						
Air Inlet Relative Humidity	Air Outlet Relative Humidity						
64,74 %	86,33 %						
Air Inlet - Outlet Enthalpy	Fluid Flow / Vol. Flow						
56,45 - 42,94 kJ/kg	6.327 kg/h / 6.328 dm³/h						
Air Press.Drop(Wet/Dry)	Fluid Press.Drop / Fluid Velocity						
31 Pa / 26 Pa	45,02 kPa / 1,52 m/s						
Coil Surface Area	Tube Inner Volume						
53,42 m²	12,60 L						
Manifold / Conn.QTY	Conn.Direction						
1 / 1	Right						
Connection Sizes	Air Condensation		Hygienic	Blygold			
48,3 / 48,3 mm (1-1/2" DN40 / 1-1/2" DN40)	21,80 l/h						

Bypass Damper

ACCESSORIES (M7)

Siphon



FILTER (M3)

Air Flow	Condensation Pan		Hygienic	Spare Filter	Section Weight
8.450 m³/h					192 kg
Filter Type	Initial / Final / Design P.Drop	Air Velocity	Size/Quantity/EC*	Size/Quantity/EC*	Size/Quantity/EC*
M6 Panel	68 Pa / 168 Pa / 118 Pa	1,94 m/s	592x592x48/2/E	592x287x48/3/E	


* Filter Energy Performance; preferably energy classification

* Frame sealing applied.

ACCESSORIES (M3)

Lightening, Observation Glass, Manometer Pressure Gauge



	TECHNICAL DATA			
	Date	21.08.2020	Rev. Date	24.09.2020
	Project ID	4157	Tracking Number	4126
	Project Name	J Prime 25 Selection		
AHUSEL V.	2.2.3.17 15.08.2020	AHU Name	J Prime_25_90_1RH_3RC - (1 QTY)	
BSK	7/8	AHU Model	JUPITER 12 X 20	



EXHAUST FAN (M5)

Air Flow	8.450 m ³ /h	Fan Model	EBM Papst-R3G400PA2703		Quantity	1	Section Weight	196 kg												
Internal Static Pressure	258 Pa	Motor P./Pha./Volt./Freq.	3,65 kW/3P/400V/50-60Hz		Isolator		Isolator Count													
External Static Pressure	250 Pa				Backup Fan		Backup Motor													
Total Static Pressure	508 Pa																			
Total Pressure	614 Pa								System Effect	17 Pa										
Total / Static Efficiency	57,93 / 47,95 %																			
Shaft Power / Absorbed Power	2,49 / 2,7 kW								Absorbed Pow.With VFD	2,7 kW										
Fan Speed	2447 rpm (Max.2800 rpm)																			
	Air Density								1,3505 kg/m ³											
Specific Fan Power (SFPe int)	0,41 kW/(m ³ /s)								Sound Power Level (dB)											
Electrical Current	3,90 A (Max.5,73 A)								Hz	63	125	250	500	1000	2000	4000	8000	LwA-tot	92,6	dBa
									SPLm - Outlet Side	74,8	76,0	81,7	84,4	86,5	87,9	81,2	84,8			
									SPLa - Inlet Side	70,6	74,8	81,8	83,7	77,8	77,2	74,4	85,0		87,3	dBa

* The fan system effect is taken into account in the fan performance
 * The fan calculated for wet conditions
 * Sfp is calculated based on clean filter & dry coil conditions

ACCESSORIES (M5)

Lightening, Observation Glass	
-------------------------------	---------------------------------------------------------------------------------------

www.bskhavalandirma.com.tr Office Tel: +90 216 669 09 70 Factory Tel: +90 216 669 09 70
 info@bskhavalandirma.com.tr Office Fax: +90 216 669 09 72 Factory Fax: +90 216 669 09 72

